

# TECHNICAL HEATERS

ELECTRICALLY HEATED

**SERIES 500 STAINLESS STEEL HOSES**

## **MODEL 500 BENDABLE**

Model 500 Heat/Line hose features a bendable, smooth bore stainless steel tube for use in fixed applications where tubing is to be bent to the desired configuration and where flexibility is not required. Unique features include a built-in electrical heating element which provides temperatures up to 600°F (315°C). The electrical insulation features a polyimide film with excellent dielectric properties. The hoses come standard with double high temperature thermal insulation, durable scuff resistant jacket and 1" bare tubing on each end.

## **MODEL 500F FLEXIBLE**

This hose features a flexible stainless steel convoluted core for use in applications where limited flexibility is required. It provides non-rigid connections for conveying liquids, gases and semi-solids at temperatures up to 500°F (258°C). It features the same basic construction and materials as our Model 500 Bendable, and is available with bare tube ends for compression fittings.

## **MODEL 500EF EXTRA FLEXIBLE**

This hose is the same as our Model 500F, but is more flexible due to its unique construction. It incorporates a built-in electric heating element that provides temperatures up to 450°F (232°C). The electrical insulation is fiberglass reinforced silicone rubber.

GAS ANALYZER SYSTEMS

HOT MELT SYSTEMS

PETROLEUM PRODUCTS

CHEMICAL TRANSFER

FOOD PRODUCTS

PAINT SYSTEMS

WATER & WASTE DISPOSAL

HOT OIL LINES

BULK TRANSFER



**TECHNICAL HEATERS, INC.**

# CONSTRUCTION

	500 BENDABLE	500F FLEXIBLE	500EF EXTRA FLEXIBLE
<b>CORE</b>	<b>Stainless Steel Tubing Smooth Bore</b>	<b>Stainless Steel Convuluted</b>	<b>Stainless Steel Convuluted</b>
<b>OVERBRAID</b>	<b>None</b>	<b>Stainless Steel High Density</b>	<b>Stainless Steel High Density</b>
<b>HEATING ELEMENT</b>	<b>Spiral Wound Resistance Wire Completely Sealed</b>	<b>Spiral Wound Resistance Wire Completely Sealed</b>	<b>Spiral Wound Resistance Wire Completely Sealed</b>
<b>ELECTRICAL INSULATION</b>	<b>Kapton® Polyimide Film</b>	<b>Kapton® Polyimide Film</b>	<b>Fiberglass Reinforced Silicone Rubber</b>
<b>THERMAL INSULATION</b>	<b>Double High Temp. Fiberglass</b>	<b>Double High Temp. Fiberglass</b>	<b>Double High Temp. Fiberglass</b>
<b>EXTERNAL JACKET</b>	<b>Abrasion Resistant Sleeving or Extruded Polyurethane Jacket</b>	<b>Abrasion Resistant Sleeving or Extruded Polyurethane Jacket</b>	<b>Abrasion Resistant Sleeving or Extruded Polyurethane Jacket</b>
<b>MAXIMUM OPERATING TEMP.</b>	<b>600°F (315°C)</b>	<b>500°F (263°C)</b>	<b>450°F (232°C)</b>

# ELECTRICAL SPECIFICATIONS

## OPERATING VOLTAGE:

Any single phase voltage to 480 VAC. Depending on length, hoses may be ordered to operate on 208, 240 or 480 VAC, 3 phase.

## POWER DENSITY:

Power density is based on the desired operating temperature, ambient temperature and size of hose. Our engineering staff will help you determine wattage necessary to maintain temperature required for your application.

## TEMPERATURE CONTROL:

Series 500 Heat/Line Hoses must be controlled to maintain the desired operating temperature and to ensure operation within design limits. A sensor for the controller is installed in the hose during construction, and unless otherwise specified, is located 2 ft. from the lead end. For very close temperature control, a solid state proportional controller is recommended.

## POWER/CONTROL CABLE:

Standard length is 4 feet. Longer lengths are available.

# AVAILABLE OPTIONS

## SELF-LIMITING HOSE:

Custom designed to maintain your minimum operating temperature without the need of a controller.




## MODULAR:

Hydraulically in series, electrically in parallel. Suitable for individual use or in combinations.



## MULTIPLE TUBE BUNDLES

Available in any combination you specify. Heated and unheated.

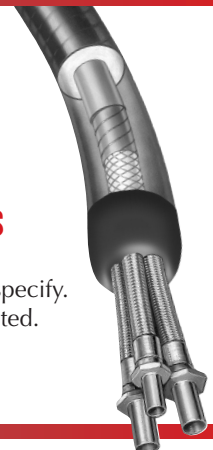

- Messenger wires available in different gauges & colors.
- Higher temperatures

- Multiple Sensors
- Bulk

- Approved for Class I Div. 2 Group C & D
- ETL/CSA Approval

- Color coded
- Varied watt density
- Other alloy cores

## MODEL 500 • Physical Characteristics

HOSE SIZE	STAINLESS STEEL TUBE O.D.	NOMINAL O.D. with DOUBLE THERMAL INSULATION	MINIMUM BEND RADIUS	MAX. WORKING PRESSURE AT 400°F (204C)	NOMINAL WEIGHT
4	1/4" 6.35MM	1" 25.4MM	5" 12.70CM	2800 PSI 197Kg/CM <sup>2</sup>	.38 lb/ft. .57 kg/m
5	5/16" 7.94MM	1-3/16" 30.16MM	6" 15.24CM	2400 PSI 169Kg/CM <sup>2</sup>	.40 lb/ft. .59 kg/m
6	3/8" 9.5MM	1-3/8" 35MM	7" 17.78CM	1800 PSI 127Kg/CM <sup>2</sup>	.45 lb/ft. .66 kg/m
8	1/2" 12.7MM	1-1/2" 38.1MM	8" 20.32CM	1500 PSI 105Kg/CM <sup>2</sup>	.52 lb/ft. .76 kg/m



## TH900 TEMPERATURE CONTROLLER

### MAIN FEATURES

- Digital communication
- Large display
- Self-tuning (active tune)
- Heat/cool control
- Alarm output
- Analog output
- Digital input
- Heater break alarm
- Loop break alarm
- IP66



<b>Input</b>	T/C, RTD DC Voltage/current
<b>Sampling</b>	0.5 sec
<b>Accuracy</b>	±(0.3% of displayed value +1 digit)
<b>Control</b>	PID control (heat/cool control available)
<b>Output</b>	M, V, R, G, T
<b>Communication</b>	RS-485 (RKC/ANSI, Modbus) MapMan* DeviceNet* PROFIBUS* *External converter required.

## WATT DENSITY REFERENCE

### MODEL 500F & MODEL 500EF

WATTS PER FT.	▲T Based on 2" I.D. Hose	▲T Based on 4" I.D. Hose
40 watts	280°F (138°C)	105°F (41°C)
50 watts	350°F (177°C)	130°F (54°C)
60 watts	400°F (204°C)	150°F (66°C)
75 watts	450°F (232°C)	180°F (82°C)
100 watts	525°F (274°C)	220°F (104°C)
150 watts	615°F (324°C)	275°F (135°C)
200 watts	-----	325°F (163°C)
300 watts	-----	390°F (199°C)

Use as a nominal guide only.

Bare tube for  
compression  
fittings



## MODEL 500F (Flexible) • Model 500EF (Extra Flexible)

HOSE SIZE I.D.	NOMINAL O.D. with DOUBLE THERMAL INSULATION	MAX. WORKING PRESSURE AT 400°F (204C)	NOMINAL WEIGHT
1/4" 6.35MM	1-1/8" 2.86CM	1300 PSI 91.4Kg/CM <sup>2</sup>	.42 lb/ft. .62 kg/m
3/8" 9.52MM	1-1/4" 3.17CM	950 PSI 66.8Kg/CM <sup>2</sup>	.48 lb/ft. .71 kg/m
1/2" 12.7MM	1-3/8" 3.5CM	800 PSI 56.2Kg/CM <sup>2</sup>	.52 lb/ft. .76 kg/m
3/4" 19.05MM	1-3/4" 4.44CM	500 PSI 35.2Kg/CM <sup>2</sup>	.75 lb/ft. 1.11 kg/m
1" 25.4MM	2" 5.08CM	400 PSI 28.1Kg/CM <sup>2</sup>	1.0 lb/ft. 1.48 kg/m
1-1/4" 31.75MM	2-3/8" 6.03CM	300 PSI 21.1Kg/CM <sup>2</sup>	1.10 lb/ft. 1.62 kg/m
1-1/2" 3.8CM	2-5/8" 6.67CM	275 PSI 19.3Kg/CM <sup>2</sup>	1.38 lb/ft. 2.04 kg/m
2" 5.1CM	3-1/8" 7.94CM	250 PSI 7.6Kg/CM <sup>2</sup>	1.75 lb/ft. 2.59 kg/m
2-1/2" 6.35CM	3-5/8" 9.21CM	200 PSI 14.0Kg/CM <sup>2</sup>	2.25 lb/ft. 3.33 kg/m
3" 7.62CM	4-1/8" 10.48CM	150 PSI 10.5Kg/CM <sup>2</sup>	2.50 lb/ft. 23.70 kg/m
4" 10.16CM	5-1/8" 13.02CM	100 PSI 7.0Kg/CM <sup>2</sup>	3.25 lb/ft. 4.81 kg/m


## WATT DENSITY REFERENCE

### MODEL 500 (Data based on 3/8" hose)

WATTS PER FT.	▲T (DOUBLE INSULATION)
10	190°F (88°C)
15	250°F (121°C)
20	360°F (182°C)
25	470°F (243°C)
30	550°F (288°C)
35	620°F (327°C)


Use as a nominal guide only.

**3-DIMENSIONAL HEATERS**

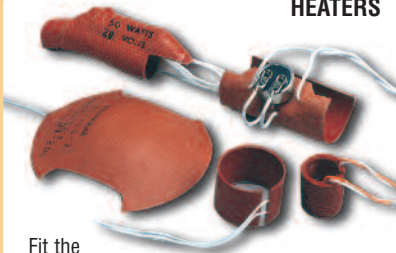

Fit the contour of your part or product perfectly.


**KAPTON® HEATERS**

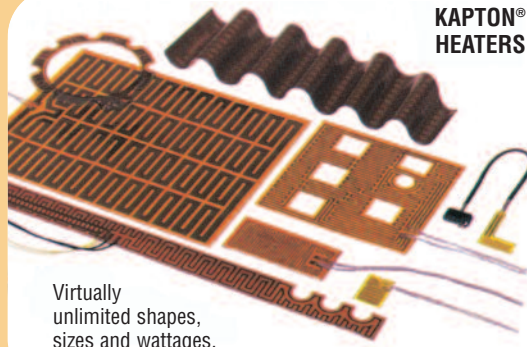

Virtually unlimited shapes, sizes and wattages.


**HEATED LINES TO MEET STRINGENT REQUIREMENTS**

- MIL-I-45208A
- FAR. 25-1359

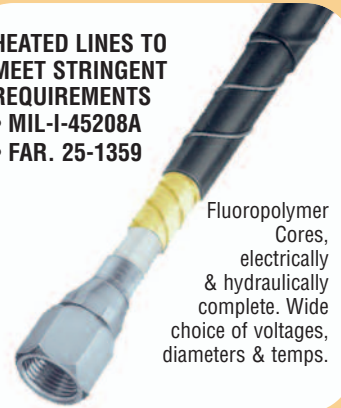

Fluoropolymer Cores, electrically & hydraulically complete. Wide choice of voltages, diameters & temps.

**HEATERS BONDED TO MATING METAL PARTS**

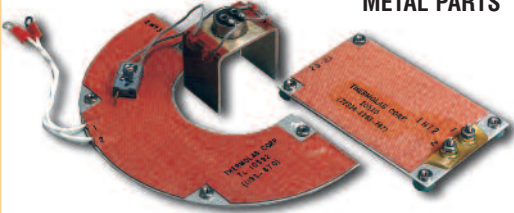

Provide a perfect fit between heater and part for complete sub-assemblies of high efficiency.

**Leaders in the development of electrically heated products since 1968**

Since 1968, we have pioneered the creation of a wide spectrum of the electrically heated products that have become indispensable elements in today's industrial world. Our broad line of electrically heated hoses and tubing has made us an industry leader in that field: with such products prominently employed in pollution monitoring and control, gas sampling, freeze protection and the efficient transfer of viscous products in the petrochemical, food processing and chemical fields.

We have been in the forefront of the heater and flexible circuit industry since its inception. Working with the engineering staffs of the world's leading corporations, we have played a leading role in developing the materials, technologies and manufacturing techniques that have brought these products from a few simple devices to the almost limitless array of sophisticated units that now play a vital role in contemporary space exploration, advanced medical research and the electronic processing of information.

**MODULAR UNITS...**hydraulically in series and electrically in parallel...use them individually or in combinations.



**LARGE DIAMETER HEATED HOSE**

With smooth or convoluted cores for:

- WASTE WATER
- FREEZE PROTECTION

**SAMPLING HOSE**


Custom built to your specific needs



**SELF LIMITING HOSE**


**PROBE SUPPORT BUNDLES**

**MULTIPLE TUBE BUNDLES**

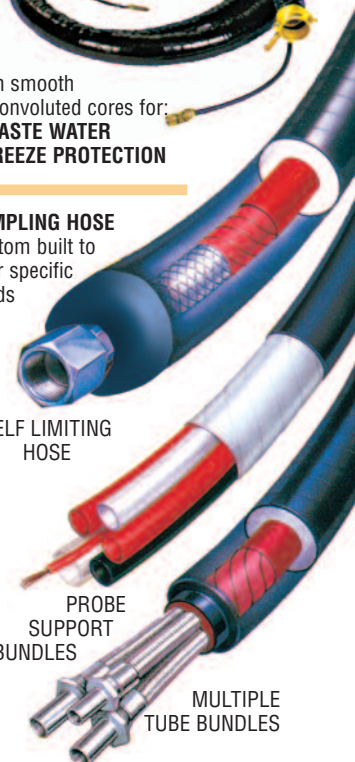

**FLAT FLEXIBLE UNITS**

may be die-cut to virtually any size, shape or configuration.

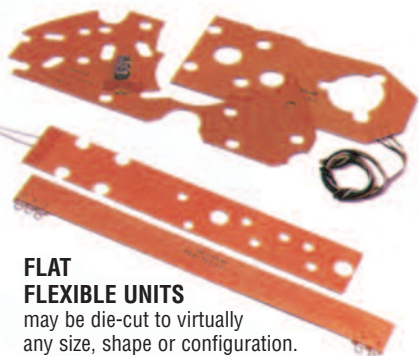

**SILICONE RUBBER HEATERS**



Single, rugged and economical, in a wide range of shapes, sizes, and insulations.

**HOT MELT HOSES**

Built to your spec's or off-the-shelf. Unequaled inventories.

**REPLACEMENT OR REPAIR,** in fast turn-around times!



**BULK HOSE**

In high and low temperature designs and in lengths of 100 ft. or more. Parallel circuitry allows you to cut the hose to the exact lengths you need.



**Technical Heaters, Inc. / THERMOLAB**

10959 Tuxford Street, Sun Valley, CA 91352 • 818/365-9435 • 800/394-9435 • Fax: 818/361-2788

www.TechHeat.com • E-Mail: sales@TechHeat.com

